



Assembly Instructions

K. Plate World Cup

Step 1: Plate preparation


Tools required: Phillips Screwdriver PZ 3



Picture 1: Placement of base plates


As the K. Plate World Cup is not directly attached to the board, the first step is to attach the two black base plates to the board. The base plate with the elongated holes should be installed at the front of the board. Check to make sure that the plate can still slide in both directions. As preparation, remove the 3 middle screws from each of the red aluminium plates. Then position each of the black base plates (as per picture 1) and affix with the 4 screws.

The distance between the outer edges of each of the base plates should be 640mm.

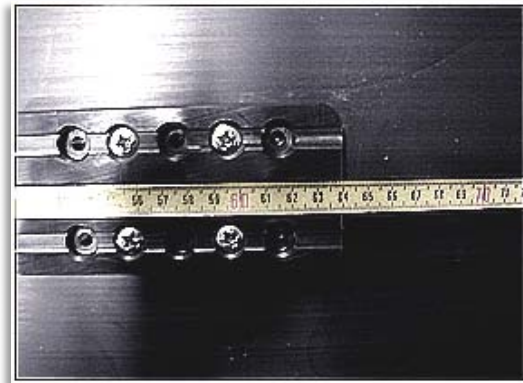

Picture 2: Distance between the outer edges

Step 2: Attaching the rails to the base plates

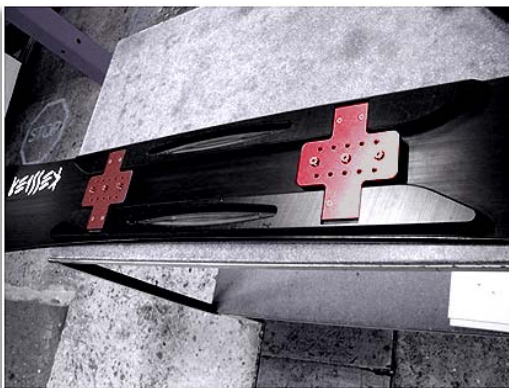

Picture 3: Positioning the rails on the board.

Now you can attach the K. Plate World Cup to the board. Do this by screwing in the 3 middle screws on the plate to the base plates on each side of the board.

If required, the width of the plate can now be adjusted. This can be done by unscrewing the 4 screws that are holding the 2 rails in place. Determine your preferred width, and then affix the screws again to keep the plate in the

